NEW RADIUS 5 *MkII* Record Player

RADIUS 5

The new RADIUS5 *MkII* builds on the strengths of the award winning RADIUS5 enhancing performance, compatibility and even the aesthetics.

From its new Motor mount to the new polished stainless steel feet the New MKII manages to combine beauty, elegance and true high-end performance all in one package.

FEATURES:

- New High Tolerance Main Bearing
- Optimised Motor Power Supply
- Upgraded decoupling and Motor suspension mounts
- New custom made silicone Drive Belt
- Improved coupling to supporting structure
- New polished stainless steel feet with silicone coupling
- Enhanced aesthetics
- Clear Acrylic or Black Acrylic finish

- New improved Nima tonearm Pillar Holder
- Improved Nima Unipivot bearing pillar
- New custom made High Rigidity Arm Tube
- New Head-shell and Bearing Yoke attachment to Arm Tube
- Improved Anti-skate system
- New optional Heavy Counter Weight
- New improved Internal wiring

NEW Radius 5 MkII

Radius 5 *MkII*

Main Bearing Spindle	Precision machined stainless steel
Main Bearing Housing	Precision machined solid brass
Main Bearing Ball	Precision case hardened steel
Pulley	Precision machined aluminium alloy
Platter	Precision machined acrylic
Motor	Custom made 24 pole synchronous
Speed	33 & 45 rpm
Power	110 or 220 Vac - 50/60 Hz
Rumble	<-80dB
Wow & Flutter	<0.04%
Dimension	400 x 350 x 150mm (W x D x H)
Weight	7Kg

NIMA *MkII*

Bearing	Precision Stainless Steel; Unipivot
Bearing Yoke	Precision machined Acrylic
Arm Tube	Custom Design Aluminium Alloy Extrusion
Headshell	Precision machined Acrylic
Effective Length	240mm
Overhang	17.5mm
Distance from Record Centre	222.5mm
Headshell Offset Angle	22.9º
Effective Mass	10r
Mounting Hole Diameter	23mm
Arm Board Thickness	5 – 25mm (max.)
Recommended Cartridge Weight	5 -12g
Recommended Tracking Weight	1.5 - 3.5g
Internal Wiring	Enameled & Silver Plated Pure Copper
Tonearm Cable	Shielded Coaxial with Grounding wire
Connectors	5-pin Gold Plated to RCA Gold Plated

RADIUS 5

MkII
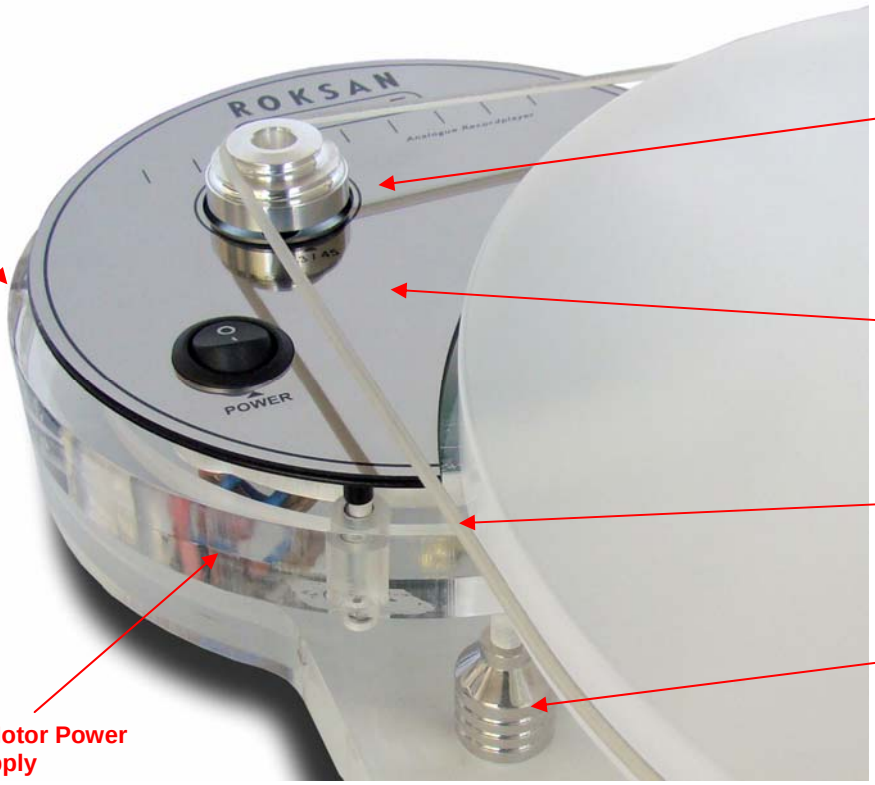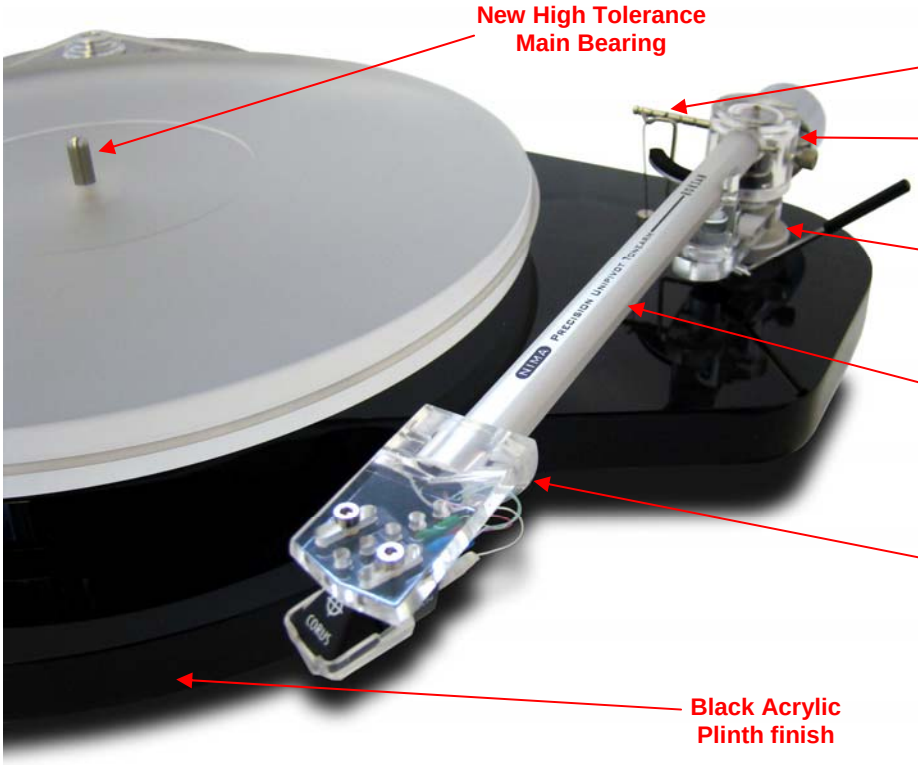
NEW Radius 5 MkII